

INDOOR

An intelligent range of lighting solutions for indoor use. Simple, trendy yet utility based, these luminaires are designed on a minimalistic perspective and come in classic cone, cylinder and sphere shapes. Unobtrusive and restrained, they blend in subtly with the decor to create an inviting mood.




RECESSED DOWNLIGHTS

Combining style and functionality, these downlights are created for optimum light throw and efficiency. Available in a range of diffused and spot glows, there is one to suit each of your need. They are easy to install and can be customised with finish, optics and LED color options.




Invisio



05000000201 0 200
 2W 188lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

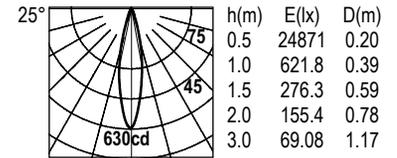


- Recessed fixed capsule light ideal for ceiling and for installation in furniture
- Construction in machined aluminium
- Powder coated for corrosion resistance
- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut

- Extruded aluminium for better heat sink of LED
- Fixture holding system using SS-304 fastening TRI clip
- Strain relief cable clamp with quick connect LED harness
- Ceiling thickness 3 to 30mm


- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current remote 24V, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85

Gola Micro



21800000201 000 300
 2W 138lm 6000K
 Cut Off Angle : 20° Optics : 90°

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

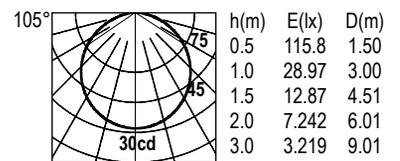


- Recessed fixed low profile diffused down light for cabinet lights
- Construction in CNC machined aluminium frame
- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- High efficiency PMMA diffuser


- Powder coated for corrosion resistance.
- Fixture holding system using stainless Steel -304 fastening clip.
- Strain relief cable clamp with quick connect LED harness
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 5 to 30mm

- Wire for mains supply cable up to 2c×1.5 mm².
- Reiz Electronic LED driver constant current 24dc remote, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85

Gola Mini Lensed



0530000801 1 200
 8W 628lm 6000K
 Cut Off Angle : 45°
Led Color **Optics** **Finish**
 C 6000K 12° W White
 N 4000K 24° B Black
 W 3000K 36° S Silver

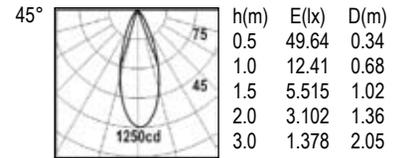


- Recessed fixed capsule light ideal for ceiling and for installation in furniture
- Construction in CNC machined aluminium frame
- Powder coated for corrosion resistance.


- Fixture holding system using stainless Steel -304 fastening clip.
- Strain relief cable clamp with quick connect LED harness
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm

- Wire for mains supply cable up to 2c×1.5 mm².
- Reiz Electronic LED driver constant current 24dc remote, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85

Cavern



2100000201 000 200
 2W 165lm 6000K
 Cut Off Angle : 30° Optics : 45°
Led Color **Finish**
 C 6000K W White
 N 4000K B Black
 W 3000K S Silver

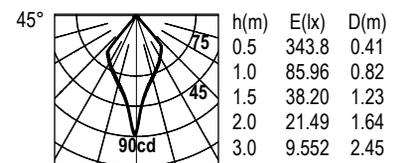


- Recessed fixed LED downlighter for hotels & retail in cabinet
- Construction in extruded CNC machined aluminium
- powder coated for corrosion resistance
- Fixture holding system using SS-304 fastening TRI clip

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Strain relief cable clamp with quick connect LED harness
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm
- Wire for mains supply cable 2c×1.5mm²


- Reiz Electronic LED driver constant current remote, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85

Torch Mini



2000000801 0 200
 8W 722lm 6000K
 Cut Off Angle : 54°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

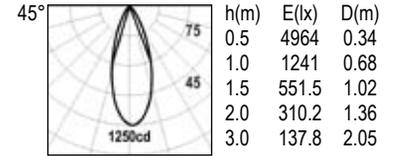


- Deep recessed fixed down light in torch shape
- Construction in die-cast aluminium frame
- Powder coated for corrosion resistance
- Fixture holding system using SS-304 fastening springs
- Extruded aluminium for better heatsink of LED

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable 2c×1.5mm²


- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85

Shower




0570000801 1 300
 8W 665lm 6000K
 Cut Off Angle : 25°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

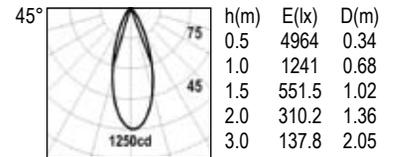


0570000204 1 300
 12W 1000lm 6000K
 Cut Off Angle : 25°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

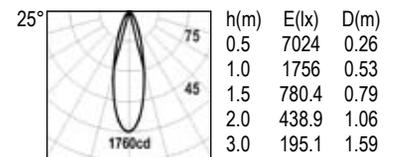

0570000207 1 300
 16W 1260lm 6000K
 Cut Off Angle : 25°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

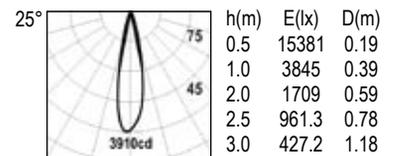


- Low glare fixed downlight for wet locations with tempered safety glass
- Construction in die-cast aluminium and pressed steel frame
- Powder coated for corrosion resistance
- Two parts mounting for easy installation and maintenance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Fixture holding system using SS-304 fastening wings
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with quick connect LED harness

- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85


Ghost



12905300801

8W 650lm 6000K
Cut Off Angle : 40°


Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

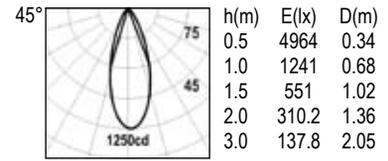

12905300204

12W 1010lm 6000K
Cut Off Angle : 40°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

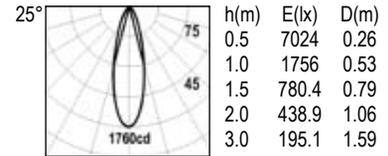


- Recessed fixed down lighting flat trim round aperture for a deep recessed glare free light
- Construction in die-cast aluminium flat trim
- Powder coated for corrosion resistance
- Two parts mounting for easy installation and maintenance
- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut

- Fixture holding system using stainless steel-304 fastening wings
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with quick connect LED harness

- Wire for mains supply cable 2C×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85


Lunia Micro



22919508W00

8W 562lm 6000K
Cut off Angle

Led Color	Optics	Finish
C 6000K	36°	W White
N 4000K		B Black
W 3000K		S Silver

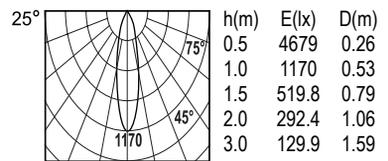


- Low glare deep recessed fixed down light
- Construction in die-cast aluminium
- Round Gimble frame on a compass fitting mechanism adjustable ±30° in all directions
- Powder coated for corrosion resistance
- Fixture holding system using stainless steel-304 fastening springs

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with quick connect LED harness

- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 3macadam ellipse
- LED CRI : 85


Lunia Mini



05505300801 ■ 1 ■ 200

8W 732lm 6000K
Cut Off Angle : 40°


Led Color	Optics	Finish
C 6000K	36°	W White
N 4000K		B Black
W 3000K		S Silver

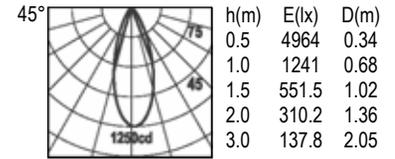

05505301501 ■ 1 ■ 200

15W 1380lm 6000K
Cut Off Angle : 40°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

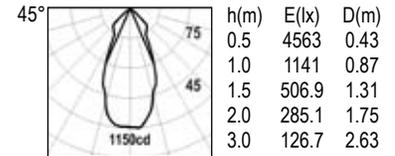


- Low glare deep recessed fixed down light
- Construction in die-cast aluminium frame
- Powder coated for corrosion resistance
- Reflector aluminium 99.9% silver bright anodized
- Fixture holding system using stainless steel-304 fastening springs

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with quick connect LED harness

- Wire for mains supply cable 2x1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4 macadam ellipse
- LED CRI : 85


Trimless Lunia Mini



055054008000251 ■ 200

8W 720lm 6000K
Optics : 80°


Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

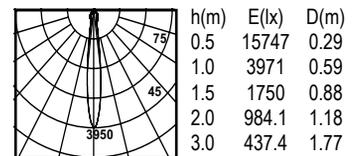

055054012000251 ■ 200

12W 1086lm 6000K
Optics : 80°

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

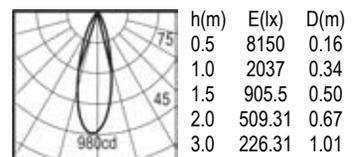


- Low glare deep recessed fixed trimless down light
- Construction in aluminium Frame with 2 point support system.
- Premounting Kit available for ease of installation
- Optional dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut

- Fixture holding system using stainless steel-304 fastening springs/wing
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable 2x1.5mm²

- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 3macadam ellipse
- LED CRI : 85


Lunia Maxx



06109000206 900 2EX

15W 1384lm 6000K
Cut Off Angle : 40° Optics : 80°


Led Color		Finish	
C	6000K	W	White
N	4000K	B	Black
W	3000K	S	Silver

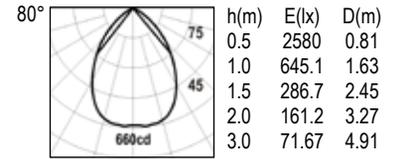

06109000209 900 2EX

20W 1810lm 6000K
Cut Off Angle : 40° Optics : 80°

Led Color		Finish	
C	6000K	W	White
N	4000K	B	Black
W	3000K	S	Silver

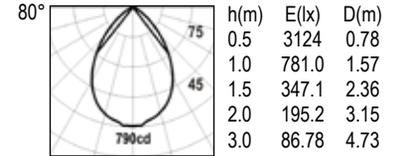


- Low glare deep recessed downlighter for soft downlighting
- Construction in die-cast aluminium frame
- High efficiency PMMA diffuser with 90% transmittance, U.V Stabilized
- Powder coated for corrosion resistance
- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut

- Reflector aluminium 99.9% silver bright anodized
- Fixture holding system using SS-304 fastening springs/wing
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 12 to 30mm
- Strain relief cable clamp with quick connect LED harness

- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85


Lunia Maxx Lensed



06109000207 251 20L

16W 1360lm 6000K

Led Color		Finish	
C	6000K	W	White
N	4000K	B	Black
W	3000K	S	Silver

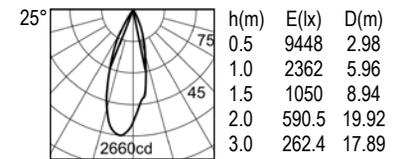

06109000307 251 20L

25W 2252lm 6000K

Led Color		Finish	
C	6000K	W	White
N	4000K	B	Black
W	3000K	S	Silver




- Low glare deep recessed downlighter for spot lighting
- Construction in die-cast aluminium frame
- Powder coated for corrosion resistance
- Reflector aluminium 99.9% reflective powder coated
- Fixture holding system using SS-304 fastening springs/wing


- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with quick connect LED harness

- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85


Lunia Mega



06207000209 801 200
 20W 1810lm 6000K
 Cut Off Angle : 40° Optics : 80°
Led Color **Finish**
 C 6000K **W** White
 N 4000K **B** Black
 W 3000K **S** Silver

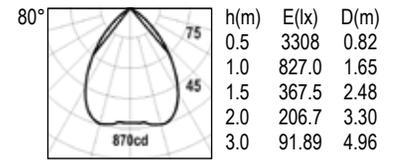

06207000309 801 200
 30W 2700lm 6000K
 Cut Off Angle : 27° Optics : 80°
Led Color **Finish**
 C 6000K **W** White
 N 4000K **B** Black
 W 3000K **S** Silver

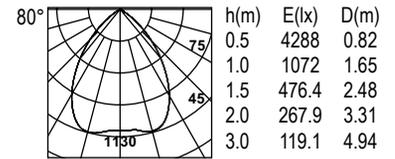


- Low glare fixed downlight with polycarbonate diffuser
- Construction in die-cast aluminium and pressed steel frame
- Powder coated for corrosion resistance
- High efficiency PMMA diffuser with 90% transmittance, U.V Stabilized
- Fixture holding system using SS-304 fastening wings


- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heat sink of LED
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable 2c×1.5mm²

- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85


Sun Mini



05605306W09 1W200
 6W 548lm 6000K
 Cut Off Angle : 12°
Led Color **Finish**
 C 6000K **W** White
 N 4000K
 W 3000K

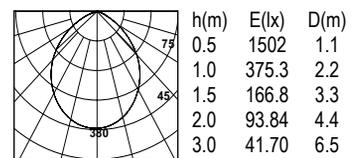

05605310W09 1W200
 10W 904lm 6000K
 Cut Off Angle : 12°
Led Color **Finish**
 C 6000K **W** White
 N 4000K
 W 3000K

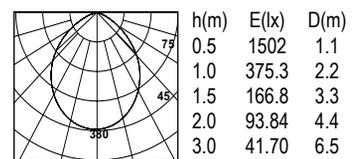


- Recessed downlighter for soft diffused look
- Highly reflective polycarbonate trim and reflector
- Fixture holding system using SS-304 fastening springs/wing
- High efficiency PMMA diffuser with 90% transmittance U.V stabilized

- Extruded aluminium for better heatsink of LED
- Ceiling thickness 5 to 30mm
- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable 2c×1.5mm²

- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85

Sun Mini Quad




056S5300801 CD1W200

6W 543lm 6000K
Cut Off Angle : 12°

Led Color
C 6000K
N 4000K
W 3000K

Finish
W White




h(m)	E(lx)	D(m)
0.5	1502	1.10
1.0	375.3	2.20
1.5	166.8	3.30
2.0	93.8	4.40
3.0	41.7	6.60

056Q5310W00 CD1W200

10W 9023lm 6000K
Cut Off Angle : 12°

Led Color
C 6000K
N 4000K
W 3000K

Finish
W White



h(m)	E(lx)	D(m)
0.5	1502	1.10
1.0	375.3	2.20
1.5	166.8	3.30
2.0	93.8	4.40
3.0	41.7	6.60




- R ecessed downlighter for soft diffused look
- Highly reflective polycarbonate trim and reflector
- Fixture holding system using SS-304 fastening springs/wing
- Extruded aluminium for better heatsink of LED
- High efficiency PMMA diffuser with 90% transmittance, U.V stabilized

- Dimable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Ceiling thickness 5 to 30mm
- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable 2c×1.5mm²

- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85

Sun Maxx




1810000112 C11W200

15W 1390lm 6000K
Cut Off Angle : 5° Optics : 80°

Led Color
C 6000K
N 4000K
W 3000K

Finish
W White
B Black
S Silver




h(m)	E(lx)	D(m)
0.5	1385	1.00
1.0	346.3	2.08
1.5	153.9	3.02
2.0	86.58	4.03
3.0	38.48	6.05

18100002509 C11W200

25W 2252lm 6000K
Cut Off Angle : 5° Optics : 80°

Led Color
C 6000K
N 4000K
W 3000K

Finish
W White
B Black
S Silver



h(m)	E(lx)	D(m)
0.5	3124	0.78
1.0	781.0	1.57
1.5	347.1	2.36
2.0	195.2	3.15
3.0	86.78	4.73




- R ecessed downlighter for soft diffused look
- Highly reflective polycarbonate trim and reflector
- Fixture holding system using SS-304 fastening springs/wing
- High efficiency PMMA diffuser with 90% transmittance, U.V Stabilized


- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 5 to 30mm
- Strain relief cable clamp with quick connect LED harness

- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85

Smooth Maxx



2082080R281 ■ 001 ■ 300
 15W 1275lm 6500K
 Optics : 100°
Led Color
 C 6000K
 N 4000K
 W 3000K
Finish
 W White
 B Black
 S Silver

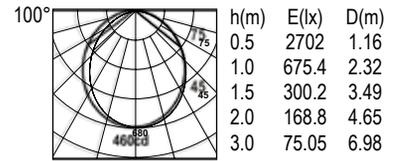


- Recessed luminaire for symmetrical wide beam light distribution for ambient lighting
- Construction in single piece mitered extruded aluminium frame
- High efficiency prismatic diffuser
- High efficiency PMMA diffuser with 90% transmittance, U.V Stabilized


- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Powder coated for corrosion resistance
- Strain relief cable clamp with quick connect LED harness
- Ceiling thickness 3 to 30mm

- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85

Smooth Mega



048095R1596 ■ 000 ■ 2RC
 36W 3302lm 6000K
 Optics : 100°
Led Color
 C 6000K
 N 4000K
 W 3000K
Finish
 W White

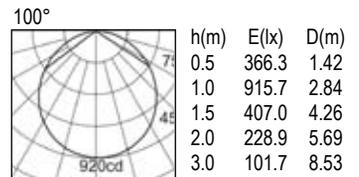


- Recessed luminaire to provide high output diffused light
- Construction in mitered extruded aluminium frame with Polycarbonate diffuser
- High efficiency PMMA diffuser with 90% transmittance, U.V Stabilized
- Powder coated for corrosion resistance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with terminal block
- Wire for mains supply cable 3c×1.5mm²


- Mounting Provision for plaster board ceiling is optional
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85

Recessed Rapier

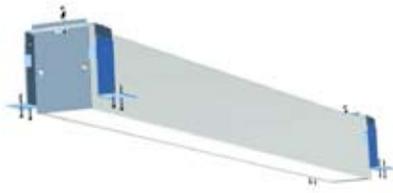


14809500121 1 2
20W 20184lm 6000K
Cut off Angle : 60°

Led Color Finish
C 6000K W White
N 4000K B Black
W 3000K S Silver

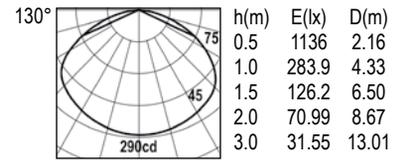

1480950R572 1 2
40W 3810lm 6000K
Cut Off Angle : 60° Optics : 131°

Led Color Finish
C 6000K W White
N 4000K B Black
W 3000K S Silver

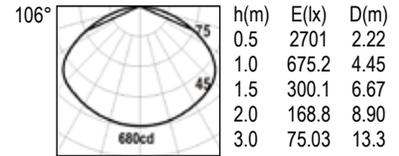


- Recessed LED luminaire for even diffused downward light
- Construction with extruded aluminium for better heatsink of LED
- High efficiency PMMA diffuser with 90% transmittance, U.V Stabilized

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Powder coated for corrosion resistance
- Fixture holding system using MS GP mounting bracket.
- Strain relief cable clamp


- Wire for mains supply cable 3c×1.5mm²
- Line Joiner to be ordered separately
- Asymmetric option is available also.
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

Trapeze



04809600218 H01 200
40W 3600lm 6000K
Optics : 100°

Led Color Finish
C 6000K W White
N 4000K B Black
W 3000K S Silver

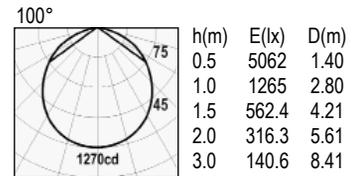

- Recessed luminaire to provide indirect soft lighting in offices
- Pressed metal trim with mitered edges
- Powder coated for corrosion resistance
- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut

- White reflector with high total reflectance for maximum light output
- Provision for hanging from ceiling
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with terminal block

- Wire for mains supply cable 3c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4macadam ellipse
- LED CRI : 85

मॅकडोनाल्ड्स

मॅकडोनाल्ड्स



#ThodaTimeAur



Introducing
MAHARAJA
MAC

The Spicy Happy




RECESSED DIRECTIONAL SPOTS

Mostly used for accent lighting, directional spots help give interiors a creative highlight. This enhanced technology based luminaire allows for easy and long lasting swivelling while the recessed and low glare optics ensure visual comfort.




Eyelid Micro




0230000201 0 200
 3W 280lm 6000K
 Cut off Angle : 50°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

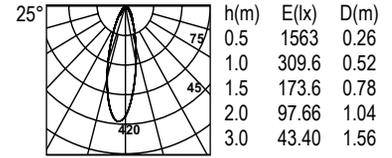

0230000800 1 200
 8W 760lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

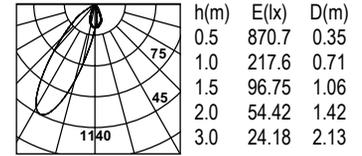


- LED recessed directional down light in flat trim swiveling upto ±30°
- Construction in extruded aluminum frame & ring
- Fixture holding system using stainless steel-304 fastening springs

- Powder coated for corrosion resistance
- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness


- Ceiling thickness 3 to 30mm
- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

Eyelid Mini




0540000800 0 200
 8W 790lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

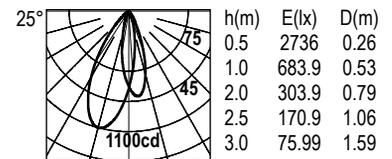


0540000204 0 200
 12W 1105lm 6000K
 Cut off Angle : 30°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

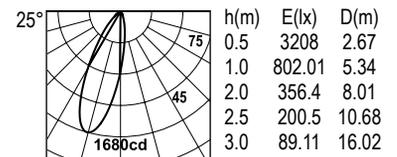

0540000207 1 200
 16W 1492lm 6000K
 Cut off Angle : 50°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

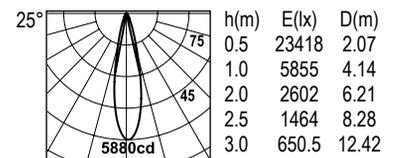


- Recessed downlight in oyster shape swiveling upto ±25° or as a deep recessed concentric
- Construction in die-cast aluminium frame
- Powder coated for corrosion resistance
- Fixture holding system using SS-304 fastening Spring

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness

- Ceiling thickness 3 to 30mm
- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85


Ghost 360



12905400801 1 200

8W 730lm 6000K
Cut off Angle : 31°


Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

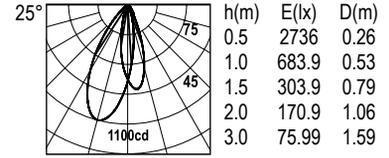

12905400204 0 200

12W 1103lm 6000K


Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

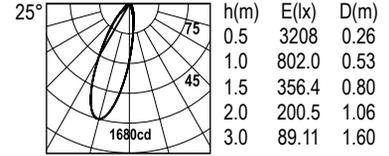

12905400207 1 200

16W 1512lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

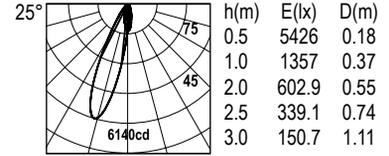


- Recessed directional down lighting flat trim round aperture swiveling up to +170°
- Construction in die-cast aluminium flat trim
- Powder coated for corrosion resistance
- Premounted cylinder for easy installation and maintenance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Fixture holding system using stainless steel-304 fastening wing
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness

- Ceiling thickness 3 to 30mm
- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85


Ghost Ellipse



13005400801 0 200

8W 742lm 6000K


Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

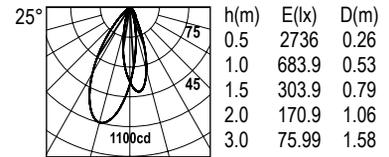

13005400204 1 200

12W 1125lm 6500K


Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

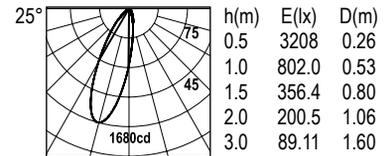

13005400207 1 200

16W 1512lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

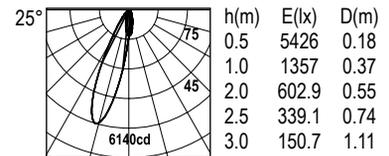


- Recessed directional down light flat trim oval aperture swiveling up to 170°
- Construction in die-cast aluminium flat trim and oval aperture mask Ø48×40
- Powder coated for corrosion resistance
- Pre mounting cylinder for easy installation and maintenance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Fixture holding system using stainless steel-304 fastening springs
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness


- Ceiling thickness 3 to 30mm
- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

Lunia Mini D




05505400801 1 2
8W 760lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

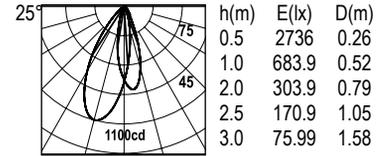


05505400204 1 2
12W 1140lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

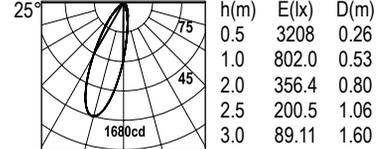

05505400207 1 2
16W 1510lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

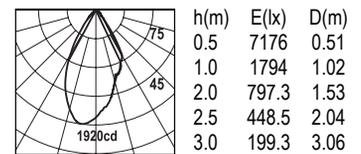


- Low glare deep recessed directional downlight, adjustable system
- Construction in die-cast aluminium frame, double trim design for easy maintenance
- Powder coated for corrosion resistance
- Premount cylinder for easy installation and maintenance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Reflector aluminium 99.9% silver bright anodized
- Fixture holding system using SS-304 fastening springs
- Extruded aluminium for better heatsink of LED


- Strain relief cable clamp with quick connect LED harness
- Ceiling thickness 3 to 30mm
- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

Scoop



05905900801 1 200
8W 710lm 6000K
Cut off Angle : 31°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver


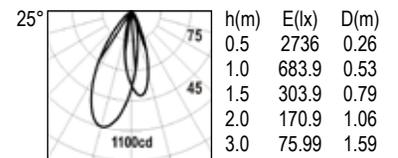


- Recessed adjustable LED downlighter for highlighting walls corners etc.
- Construction in Die-Cast aluminium frame
- Extruded aluminium radiator incorporated for better heatsink of LED
- Fixture holding system using SS-304 fastening springs

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Strain relief cable clamp with quick connect LED harness
- Ceiling thickness 3 to 30mm


- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

Trimless Uno Mini D




09013900801 1 200
8W 720lm 6000K

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

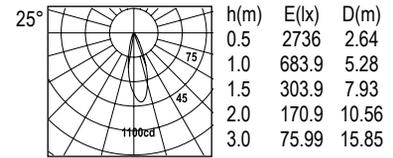

09013900204 1 200
12W 1102lm 6000K

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

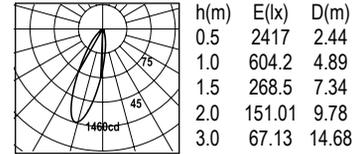


- Low glare deep recessed single square trimless down lighter
- Construction in die-cast aluminium and extruded aluminium frame
- Square gimble inner frame on a compass fitting mechanism adjustable $\pm 35^\circ$ in single access
- Powder coated for corrosion resistance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with quick connect LED harness


- Wire for mains supply cable $2c \times 1.5mm^2$
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

Gimble Uno Mini




1950000801 1 200
8W 714lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

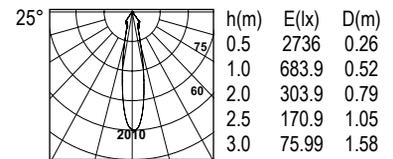

1950000204 1 200
12W 1090lm 6000K
Cut off Angle : 25°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

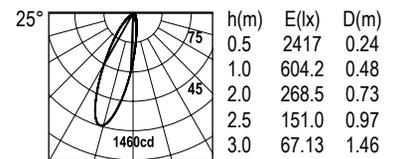


- Low glare deep recessed square down lighter with no internal visible mechanism
- Construction in extruded aluminium
- Square gimble inner frame on a compass fitting mechanism adjustable $\pm 30^\circ$ in all directions
- Powder coated for corrosion resistance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Fixture holding system using stainless steel-304 fastening springs
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm


- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable $2c \times 1.5mm^2$
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

Gimble Duo Mini




1960000802 1 200
16W 1460lm 6000K

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

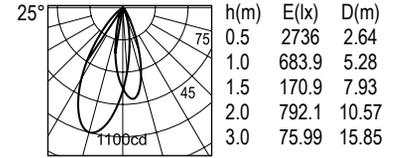

19600002408 1 200
24W 2160lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver


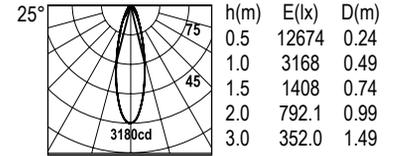


- Low glare deep recessed square down lighter with no internal visible mechanism
- Adjustable double spot light fitted into a aluminium frame
- Powder coated for corrosion resistance
- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut

- Extruded aluminium for better heat sink
- Fixture holding system using Stainless Steel -304 fastening spring
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with quick connect LED harness


- Wire for mains supply cable upto 2c×1.5 mm².
- Reiz electronic LED driver constant current integrated, THD<10% PF>0.95
- LED CRI : 85

Gimble Trio Mini

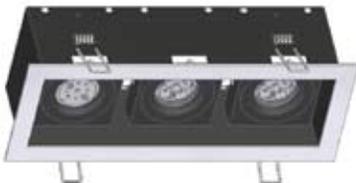


1970000803 0 200
24W 2205lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver



19700003612 0 200
36W 3243lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver


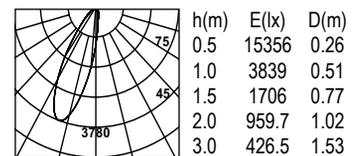


- Adjustable triple spot light fitted into a single piece frame of 3mm steel
- Construction in die-cast aluminium and pressed steel frame
- Square Gimble inner frame on a compass fitting mechanism adjustable ±30° in all directions
- Powder coated for corrosion resistance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Fixture holding system using stainless steel-304 fastening springs
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm


- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable 2c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

Gimble Uno Maxx



09000001501 0 200
15W 1420lm 6000K


Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver



h(m)	E(lx)	D(m)
0.5	10734	0.18
1.0	2684	0.36
1.5	1193	0.54
2.0	670.8	0.73
3.0	298.1	1.09

09000000212 0 200
25W 2260lm 6000K

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver




- Adjustable spot light single fitted into a single piece frame of 3mm steel
- Construction in die-cast aluminium and pressed steel frame
- Square gimble inner frame on a compass fitting mechanism adjustable $\pm 45^\circ$ in all directions
- Powder coated for corrosion resistance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Fixture holding system claw for positive locking
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with quick connect LED


- harness
- Wire for mains supply cable $2c \times 1.5mm^2$
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

Gimble Duo Maxx




09100001502 0 200
30W 2750lm 6000K

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver



09100000224 0 200
50W 4750lm 6000K

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver



- Adjustable spot light double fitted into a single piece frame of 3mm steel
- Construction in die-cast aluminium and pressed steel frame
- Square gimble inner frame on a compass fitting mechanism adjustable $\pm 30^\circ$ in all directions

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Powder coated for corrosion resistance
- Fixture holding system claw for positive locking
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm

- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable $2c \times 1.5mm^2$
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85