


## Gimble Trio Maxx



**09200001503** 451 200  
45W 4050lm 2700K

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

Photometric On Request

**09200000236** 451 200  
75W 7225K

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

Photometric On Request





- Adjustable triple spot light fitted into a single piece frame of 3mm steel
- Construction in die-cast aluminium and pressed steel frame
- Square gimble inner frame on a compass fitting mechanism adjustable  $\pm 30^\circ$  in all directions

- Powder coated for corrosion resistance
- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Fixture holding system claw for positive locking
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm


- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable  $2c \times 1.5mm^2$
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Saturn




**06100001501** 1 2  
15W 1355lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

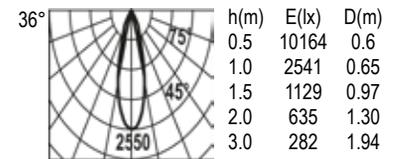

**061000030013** 1 200  
30W 2705lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

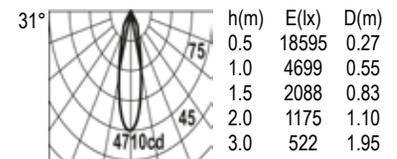


- Adjustable symmetrically, narrow to medium beam for accent lighting of artifacts
- Construction in die-cast aluminium
- Square Gimble frame on a compass fitting mechanism adjustable  $\pm 30^\circ$  in all directions
- Powder coated for corrosion resistance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Fixture holding system fastening springs
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness

- Ceiling thickness 3 to 30mm
- Wire for mains supply cable  $2c \times 1.5mm^2$
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85


## Saturn Mini



**13104700203** 1 2  
8W 692lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

h(m)	E lx	D(m)
0.5	5361	0.33
1.0	1340	0.65
1.5	596	0.98
2.0	335	1.31
3.0	149	1.96



- Adjustable symmetrically, narrow to medium beam for accent lighting of artifacts
- Construction in die-cast aluminium
- Square Gimble frame on a compass fitting mechanism adjustable  $\pm 30^\circ$  in all directions
- Powder coated for corrosion resistance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Fixture holding system claw for positive locking
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness

- Ceiling thickness 12 to 30mm
- Wire for mains supply cable  $2c \times 1.5\text{mm}^2$
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85



Addidas, Sahibabad


# WALLWASHER

A smart lighting technique for even wall washes, low glare recessed spot optimises light throw. Designed for smooth for illumination and easy installation, the fixture can be customised with LED color and finish.




Wash Mini

## Wash Mini




**05512800204** ■ 251 ■ 300  
12W 1150lm 6000K

<b>Led Color</b>	<b>Finish</b>
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

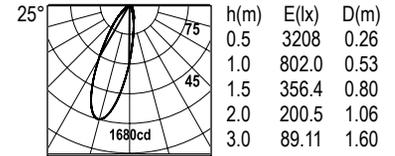

**05512800207** ■ 451 ■ 300  
16W 1440lm 6000K

<b>Led Color</b>	<b>Finish</b>
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

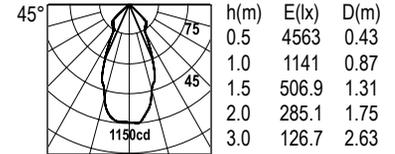


- Low glare recessed downlighter for wallwasher
- Construction in aluminium die-cast frame with two point support system
- Powder coated for corrosion resistance
- Toughened extra clear linear prismatic safety glass
- Reflector aluminium 99.9% silver bright anodized

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Fixture holding system using claw for positive locking stainless steel-304 fastening springs
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm


- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable 2c×1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Wash Maxx




**06116700207** ■ 001 ■ 200  
16W 1530lm 6000K  
Cut of Angle : 50°

<b>Led Color</b>	<b>Finish</b>
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

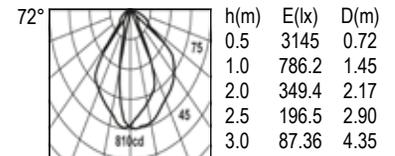

**06116703000** ■ 001 ■ 200  
30W 2860lm 6000K  
Cut of Angle : 50°

<b>Led Color</b>	<b>Finish</b>
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

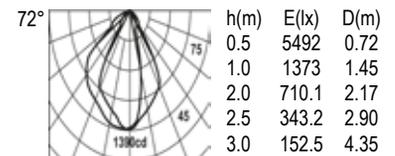


- Low glare recessed downlighter for wallwasher
- Construction in aluminium die-cast frame with two point support system
- Powder coated for corrosion resistance
- Reflector constructed from high reflective polycarbonate efficiency >82%
- Fixture holding system using claw for positive locking stainless steel-304 fastening springs

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Ceiling thickness 3 to 30mm
- Strain relief cable clamp with quick connect LED harness

- Cree COB LED consistent to 3 macadam ellipse.
- Wire for mains supply cable 2c×1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Wall washer Rectangular



**0757704000001 200**

40W 3300lm 6000K  
Optics : 100°

Led Color

C 6000K

N 4000K


W 3000K

Finish

W White

B Black

S Silver

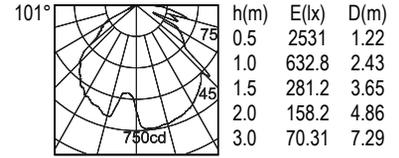

- Low glare recessed downlighter for even wallwasher
- Construction in die-cast aluminium frame with two point support system
- Powder coated for corrosion resistance
- Toughened extra clear safety glass

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Reflector aluminium 99.9% silver bright anodized
- Fixture holding system claw for positive locking using stainless steel304 Torsion springs
- Extruded aluminium for better heatsink of LED

- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable upto 2c×1mm<sup>2</sup>
- Reiz Electronic LED driver constant current remote, THD<10%, PF>0.95
- LED CRI : 85




Modern Bazaar, New Delhi



# CEILING MOUNTED DOWNLIGHTS


A set of aesthetically designed downlights that go well with any interior decor. Built on a minimalistic perspective, they are simple and discrete. They are also easy to install and can be customised using LED color and finish.

## Boxy Maxx




**0011610R348** 001 300  
15W 1460lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver



h(m)	E(lx)	D(cm)
0.5	2051	159.11
1.0	512.7	318.21
1.5	227.8	477.32
2.0	128.1	636.42
3.0	56.97	954.63




- Low Profile Surface mounted wide beam distribution luminaires for ambient lighting for lobbies, entrances, offices etc.
- Construction in extruded aluminium housing
- High efficiency PMMA diffuser with 90% transmittance, U.V Stabilized

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- White diffuser for 98% reflectance
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness


- Wire for mains supply cable 2c×1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Glo Mini



**0010320R348** 001 300  
15W 1440lm 6000K  
Optics : 100°

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver



h(m)	E(lx)	D(m)
0.5	1429	1.23
1.0	357.2	2.46
1.5	158.7	3.69
2.0	89.31	4.92
3.0	39.69	7.38



- Low Profile Surface mounted medium beam distribution luminaires for ambient lighting for lobbies, entrances, corridors, porches etc.
- Construction in extruded aluminium housing
- High efficiency PMMA diffuser.



- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- White diffuser for 98% reflectance
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness

- Wire for mains supply cable 2c×1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Kan Micro S



**02000800800 001 200**  
 8W 719lm 6000K  
 Optics : 36° 80° 100°  
**Led Color** **Finish**  
**C** 6000K **W** White  
**N** 4000K **B** Black  
**W** 3000K **S** Silver

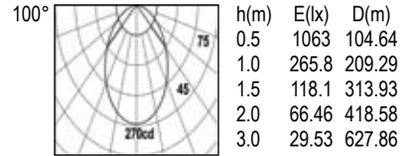


- Surface mounted luminaires for medium beam distribution for ambient lighting for lobbies, entrances, corridors etc
- Construction in single piece, extruded aluminium
- High efficiency PMMA diffuser with 90% transmittance, U.V Stabilized


- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Powder coated for corrosion resistance
- White reflector with 98% reflectance
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with terminal block
- Wire for mains supply cable upto 2c×1.5mm<sup>2</sup>

- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent to 4 macadam ellipse.
- LED CRI : 85

## Kan Milli



**01301300112 001 200**  
 15W 1290lm 6000K  
 Optics : 100°  
**Led Color** **Finish**  
**C** 6000K **W** White  
**N** 4000K **B** Black  
**W** 3000K **S** Silver

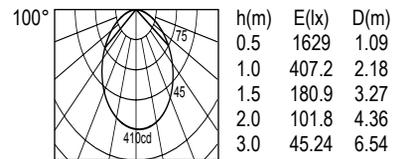


- Surface mounted luminaires for medium beam distribution for ambient lighting for lobbies, entrances, corridors etc
- Construction in single piece, extruded aluminium
- High efficiency PMMA diffuser with 90% transmittance, U.V Stabilized


- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Powder coated for corrosion resistance
- White reflector with 98% reflectance
- Extruded aluminium for better heatsink of LED

- Strain relief cable clamp with terminal block
- Wire for mains supply cable upto 2c×1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85


## Versa



**1150000801** 251 200  
 8W 750lm 6000K  
 Cut of Angle : 40° Optics : 25°  
**Led Color** **Finish**  
 C 6000K W White  
 N 4000K B Black  
 W 3000K S Silver

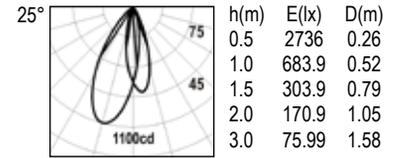

**1150000204** 251 200  
 12W 1160lm 6000K  
 Cut of Angle : 40° Optics : 25°  
**Led Color** **Finish**  
 C 6000K W White  
 N 4000K B Black  
 W 3000K S Silver

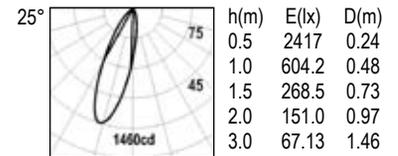


- Surface mounted directional spot with integrated LED driver for a minimalistic look
- Construction in die-casted aluminium and pressed steel frame
- Bracket mounts on a compass fitting mechanism internally and adjustable ±45° in one axis


- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Power coated for corrosion resistance
- Lamp & fixture holding system clow for positive locking using stainless steel-304 fastening springs

- Strain relief cable clamp with terminal block
- Extruded aluminium for better heatsink of LED
- Wire for mains supply cable 2c×1.5 mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85


## Rapier



**14809500121** 1 2  
 20W 20184lm 6000K  
 Cut off Angle : 60°  
**Led Color** **Finish**  
 C 6000K W White  
 N 4000K B Black  
 W 3000K S Silver

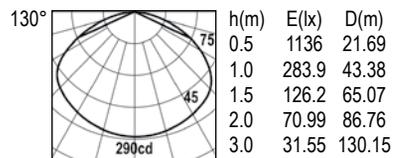

**1480950R572** 1 2  
 40W 3810lm 6000K  
 Cut Off Angle : 60° Optics : 131°  
**Led Color** **Finish**  
 C 6000K W White  
 N 4000K B Black  
 W 3000K S Silver

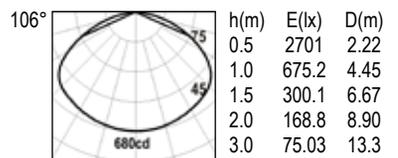

- LED luminaire for even diffused downward light
- Construction with extruded aluminium and machined brass
- High efficiency PMMA diffuser with 90% transmittance
- Powder coated for corrosion resistance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Fixture holding system clow for positive locking using stainless steel-304 fastening springs
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp
- Wire for mains supply cable 3c×1.5mm<sup>2</sup>


- Line Joiner to be ordered separately
- Asymmetric option is only available in LED version
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

# TRACK LUMINAIRES

Track Luminaires are ideal for the retail world where the frequently changing displays demand a flexible lighting system. For greater control of multiple circuits, three phase tracks can be used with various spots. Designed for easy and lasting adjustability they can be personalised using LED color, optics, finish and mounting.




## Track Jet



**0040000801** 1 2  
8W 765lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

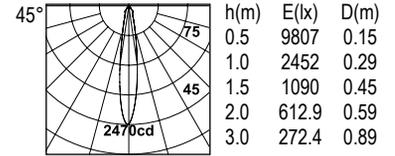


- Low glare directional downlight for track mounting
- Construction in die-cast aluminium and brass
- Powder coated for corrosion resistance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Lamp housing can rotate 340° for precise directional lighting


- Extruded aluminium for better heatsink of LED
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Catseye




**19215000204** 1 2  
8W 720lm 6000K  
Cut Off Angle : 15°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

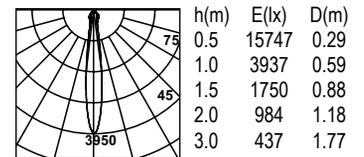

**19215000204** 1 2  
12W 1180lm 6000K  
Cut Off Angle : 15°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

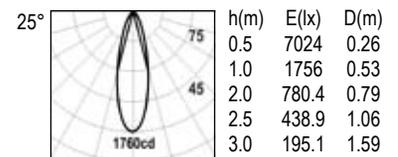


- Main voltage single or 3phase track, surface mounted light providing flexible & directional light with a narrow and medium beam for accent lighting in museum, exhibition, art galleries & retail areas

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Self-locking system at swivel 350 and tilt 90°
- Manufactured from die-cast aluminium
- Powder coated for corrosion


- Extruded aluminium for better heatsink of LED
- Wire for mains supply cable 3c×1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Sun Spot




**19017700209** 1 2  
 20W 1812lm 6000K  
 Cut Off Angle : 5°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

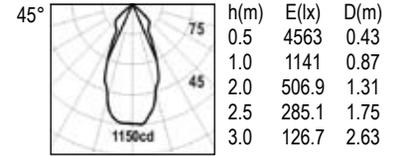

**19017703009** 1 2  
 30W 2712lm 6000K  
 Cut Off Angle : 5°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

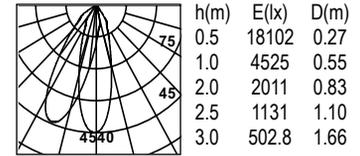

- Main voltage single phase and 3 phase track-mounted light providing flexible & directional light with a narrow, medium and wide beam for accent lighting in museum, exhibition, art galleries & retail areas
- Self-locking system at swivel 350 & tilt 90°

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Manufactured from die-cast aluminum
- Powder coated for resistance & corrosion
- Reflector aluminium 99.9% silver bright anodized

- Extruded aluminium for better heatsink of LED
- Wire for mains supply cable 3c×1.5mm²
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85


QUEST MALL, PARK CIRCUS, KOLKATA

INOX

400  
SCREENS &  
COUNTING




## Mains Voltage Track

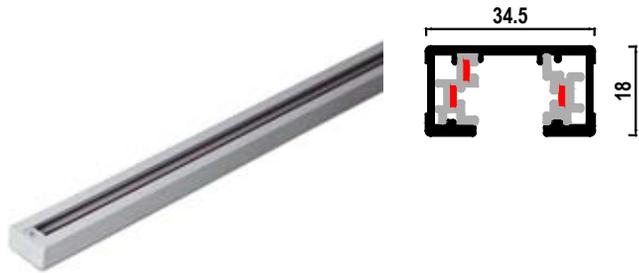


- Heavy Duty mains voltage track
- Live end connector terminal block rated for 25 amperes
- Dual locking spot adaptor rated for 10 amperes alongwith a spring loaded earth clip
- The track has pre-punched holes for fixation. Available in lengths of 1 meter, 2 meters and 3 meters
- Spot adaptor can accept maximum mechanical force of 25 Kilograms; These are with spot & glass heads
- Rectangular bus bar technology maximum area of contact, using 99.9% pure copper rated for 25 amperes load
- Available in lengths of 1 meter, 2 meters and 3 meters
- Reiz spots are available in four different colors
- All housings can withstand high temperatures and are made from Fire Retardant polycarbonate as per UL9V0 standards
- The aluminium track is also the earth conductor
- Lamps Compatible : All types
- Single phase track lights working on 240 VAC can be extended via couplers to any length, limited only by the total system voltage of 5000VA.
- Reiz Spots are available on page nos 39 & 40
- Track can be suspended to a custom drop below the ceiling by ordering the track extension system


04100000010000 ▶ 200 ▶  
MV Track  
Length = 1meter




04100000020000 ▶ 200 ▶  
MV Track  
Length = 2meter




04100000030000 ▶ 300 ▶  
MV Track  
Length = 3meter




044000000LF0000 ▶ 200 ▶  
MV Live End Left  
044000000RT0000 ▶ 200 ▶  
MV1 Live End Right




045000000NC0000 ▶ 200 ▶  
MV Straight Coupler  
Non Conductive




RPCTSPLC0108035A ▶ H0 ▶  
MV Single Phase L Coupler Inside  
046000000.02 ▶  
MV1 L Coupler Outside




RPCTSPTC0180180A ▶ H0 ▶  
MV Single Phase T Coupler Left  
047000000.02 ▶  
MV T Coupler Right




RPCTSPXC0180180A ▶ H0 ▶  
MV Single Phase X Coupler



049000000000000 ▶ 200 ▶  
MV Dead End



050000000. ▶  
MV Spot Adaptor




## 3~Phase Track




- The Reiz 3 circuit track for surface mounting is a 5-conductor track with three separately switchable circuits. It consists of an extruded aluminium profile, which also functions as earth, and an inserted plastic profile carrying 4 embedded 3 mm square copper conductors. The track can easily be cut to length on site. It is not necessary to cut or bend back the copper wire
- Spot connectors can accept maximum mechanical force of 25 Kilograms; these are integrated spot & glass head
- The track has pre-punched holes for fixation. Available in lengths of 1 meter, 2 meters and 3 meters
- The aluminium track is also the earth conductor
- The 3 circuit track fulfills the requirements of IEC 570 (VDE 0711, section 300/09.91) for 250V 16A and may be used within hand reach
- 3 circuit tracks can be combined with electronic low voltage tracks and low voltage high profile tracks by means of cubes or flexible corners for various geometry of track types
- 3 phase track lights working on 240 VAC can be extended via couplers to any length, limited only by the total system voltage of 5000VA.
- Reiz Spots are available on page nos 39 & 40
- Track can be suspended to a custom drop below the ceiling by ordering the track extension system


TKMV31M0000000000 0 ▶  
MV3 Track  
Length = 1meter




TKMV32M0000000000 0 ▶  
MV3 Track  
Length = 2meter




TKMV33M0000000000 0 ▶  
MV3 Track  
Length = 3meter




RPCTTPMJ0068031A H0 ▶  
MV3 Track Joiner Left  
33.2. ▶  
MV3 Track Joiner Right




RPCTTPLE0100032B H0 ▶  
MV3 Live End Left  
34.2 ▶  
MV3 Live End Right




RPCTTPSC0165032B H0 ▶  
MV3 Straight Coupler




RPCTTPLC0100100A H0 ▶  
MV3 L Coupler Inside  
36.2 ▶  
MV3 L Coupler Outside




RPCTTPTC0165100B H0 ▶  
MV3 T Coupler Left  
37.2 ▶  
MV3 T Coupler Right





RPCTTPXC0165165A H0 ▶  
MV3 X Coupler



TKMV3DE0000000000 0 ▶  
MV3 Dead End



40. ▶  
MV3 Spot Adaptor




# WALL MOUNTED


Minimalistic design to merge with modern interiors with direct-indirect lighting giving soft diffuse light. They can be personalised using LED color, optics & finish.



## Jet



**0040000801** 1 200  
 8W 775lm 6000K  
 Cut Off Angle : 30°  
**Led Color** **Optics** **Finish**  
 C 6000K 12° W White  
 N 4000K 24° B Black  
 W 3000K 36° S Silver

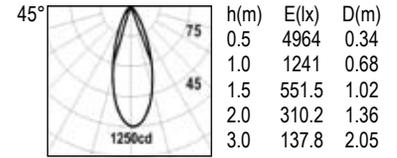


- LED spot luminaire directional up to 100° and swiveling up to 340°
- Construction in Die-cast aluminium and pressed aluminium frame
- Powder coated for corrosion resistance


- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Pressure die cast aluminium for better heatsink of LED
- Strain relief cable clamp with terminal block

- Wire for mains supply cable 3C×1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Traffic



**00401600205** 001 200  
 12W 1090lm 6000K  
**Led Color** **Finish**  
 C 6000K W White  
 N 4000K B Black  
 W 3000K S Silver




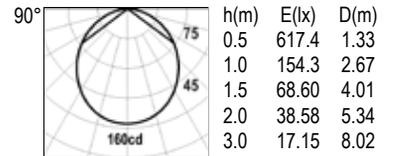


- Low profile diffused light ideal for mirrors, cabinets and retail areas
- Construction in pressed metal sheet and aluminium
- High efficiency PMMA diffuser.

- Powder coated for corrosion resistance
- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with terminal block

- Wire for mains supply cable 3C×1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Light Saber



### 01200001000 001S2B0

6W 554lm 6000K  
Cut Off Angle : 5°

Led Color		Finish	
C	6000K	W	White
N	4000K	B	Black
W	3000K	S	Silver

### 01200001000 001S2B0

9W 815lm 6000K  
Cut Off Angle : 5°

Led Color		Finish	
C	6000K	W	White
N	4000K	B	Black
W	3000K	S	Silver

### 01200001800 001S2B0






16W 1413lm 6000K  
Cut Off Angle : 5°

Led Color		Finish	
C	6000K	W	White
N	4000K	B	Black
W	3000K	S	Silver

### 01200001800 001S2B0

20W 2050lm 6000K  
Cut Off Angle : 5° Optics : 121°

Led Color		Finish	
C	6000K	W	White
N	4000K	B	Black
W	3000K	S	Silver

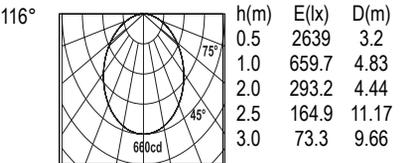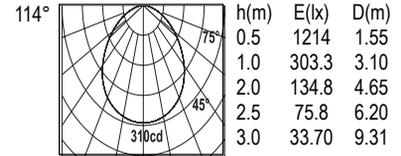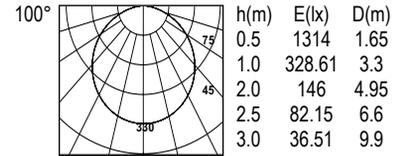


- Elementary sleek diffuse LED luminaire for mounting in general areas and covers
- Construction in extruded aluminium channel with Polycarbonate molded end caps
- Premounting polycarbonate Bracket for easy snap in installation

- Loop in loop out connectors for easy daisy chain connectors
- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut

- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED consistent on 2 macadam ellips
- LED CRI : 85


## I Light



### 13501400115 001 200

15W, 1380lm 6000K

Led Color		Finish	
C	6000K	W	White
N	4000K	B	Black
W	3000K	S	Silver

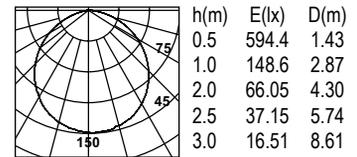


- Soft diffused light to accentuate pillars, corridors and living areas
- Construction in pressed steel sheet and diffused OPAL polycarbonate pipe
- Powder coated for corrosion resistance

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with terminal block


- Wire for mains supply cable 3x1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## ULight



**3200000724 001 500**  
7W 355lm 6000K

<b>Led Color</b>	<b>Finish</b>
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

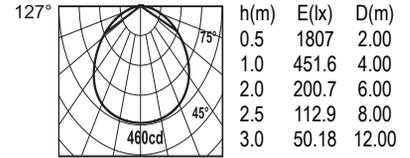

**3200001524 001 500**  
15W 1050lm 6000K

<b>Led Color</b>	<b>Finish</b>
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver




- Surface mounted low profile luminaire giving soft light at 45° angle to optimize light output from cabinets and coves and buttable for illuminating cabinets & shelves.
- Construction in extruded Anodized aluminum with buff finish

- Fixture holding system using double side tape
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness
- LED constant to 2 macadam ellipse


- Reiz Electronic LED driver constant current remote, THD<10%, PF>0.95
- LED CRI : 85

## A Light



**3200000724 001 500**  
7W 655lm 6000K  
Length : 1000mm

<b>Led Color</b>	<b>Finish</b>
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

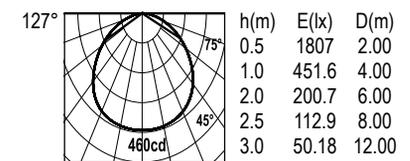

**3200001524 001 500**  
15W 1201lm 6000K  
Length : 1000mm

<b>Led Color</b>	<b>Finish</b>
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver




- Surface mounted low profile luminaire giving soft light at 45° angle to optimize light output from cabinets and coves
- Construction in extruded anodized aluminium with buff finish
- Fixture holding system using double side tape

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness
- Available with diffuser also


- Reiz Electronic LED driver constant current remote, THD<10%, PF>0.95
- LED consistent to 2 macadam ellipse
- LED CRI : 85

## Out Liner




**2560000R232 001 300**  
7W 670lm 6000K Length : 1000mm

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver



**2570000R264 001 300**  
15W 1430lm 6000K Length : 1000mm

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver



h(m)	E(lx)	D(m)
0.5	1807	2.00
1.0	451.6	4.00
2.0	200.7	6.00
2.5	122.9	8.00
3.0	50.18	12.00




- Surface mounted low profile luminaire giving soft diffuse light & buttable for illuminating cabinets & shelves
- Construction in extruded anodized aluminium with buff finish
- Fixture holding system using double side tape

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable 2C×1.5mm<sup>2</sup>

- Reiz Electronic LED driver constant current remote, THD<10%, PF>0.95
- L Channel can be ordered separately for tilting the outliner @ 45°
- LED CRI : 85

## Ledline T5



**1670000R248 001 200**  
9W 990lm 6000K Length : 550mm

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

**1670000R296 001 200**  
18W 1980lm 6000K Length : 1150mm

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver





- Surface mounted low profile luminaire giving soft diffuse light & buttable for illuminating cabinets & shelves

- Construction in extruded anodized aluminium with buff finish
- Extruded aluminium for better heatsink of LED


- Reiz Electronic LED driver constant current remote, THD<10%, PF>0.95
- LED CRI > 80

## Ledline T8




**1670000R248** ■ 001 ■ 200  
9W 810lm 6000K Length : 600mm

<b>Led Color</b>	<b>Finish</b>
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

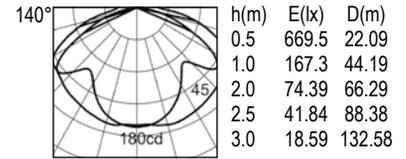

**1670000R296** ■ 001 ■ 200  
18W 1720lm 6000K Length : 1200mm

<b>Led Color</b>	<b>Finish</b>
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

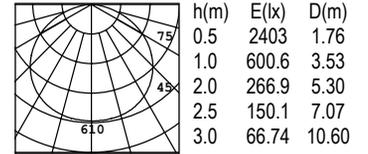


- Surface mounted low profile luminaire giving soft diffuse light & buttable for illuminating cabinets & shelves
- Construction in extruded anodized aluminium with buff finish
- Fixture holding system using double side tape

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with quick connect LED harness
- Wire for mains supply cable 2C×1.5mm<sup>2</sup>


- Reiz Electronic LED driver constant current remote, THD<10%, PF>0.95
- L Channel can be ordered separately for tilting the outliner @ 45°
- LED CRI : 85

## Wave



**21718301501** ■ 001 ■ 200  
15W 1210lm 6000K  
Optics : 90°

<b>Led Color</b>	<b>Finish</b>
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver


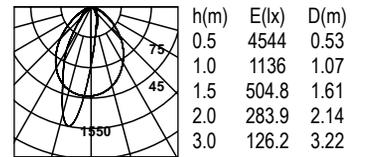


- Wall mounted uplighter for grazing of walls for use in hotels and restaurants
- Construction in die-cast aluminium and pressed metal sheet
- Powder coated for corrosion resistance


- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with terminal block
- Wire for mains supply cable 3C×1.5mm<sup>2</sup>

- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Terra



**18015300801** ■ **001** ■ **200**  
 8W 650lm 6000K  
 Cut Off Angle : 80° Optics : 180°  
**Led Color** ■ **Finish** ■  
**C** 6000K **W** White  
**N** 4000K **B** Black  
**W** 3000K **S** Silver

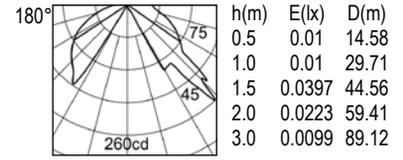

- Low glare indirect up down light for throwing grazing light for wall wash in corridors and living areas
- Construction in pressed metal sheet and extruded aluminium

- Powder coated for corrosion resistance
- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with terminal block

- Wire for mains supply cable 3x1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85




# SUSPENSION LUMINAIRES

Convenient and user friendly, these luminaires come with adjustable stainless steel suspension system to optimize height. They can be personalised using LED colors, optics and finish.





## Kan Micro



**02000800204** 1 200  
 8W 725lm 6000K  
 Cut Off Angle : 10°

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

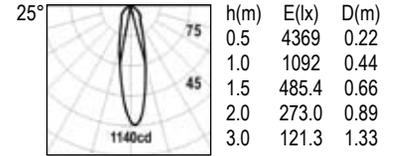


- Suspended round spot light ceiling mounted for accent lighting in residential and retail areas.
- Construction with extruded aluminium and machined brass.
- Incremental suspension SS-304 wire adjustable upto 1 meter

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heat sink of LED
- Strain relief cable clamp with terminal block
- Powder coated with high U.V. & corrosion resistance


- Wire from mains up to 2 core × 0.75mm<sup>2</sup>.
- Reiz Electronic LED driver constant current integrated, THD<15%, PF>0.95
- LED CRI : 85

## Kan Milli Sus



**02001300206** 001 200  
 15W 1435lm 6000K  
 Cut Off Angle : 40° Optics : 100°

Led Color	Finish
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

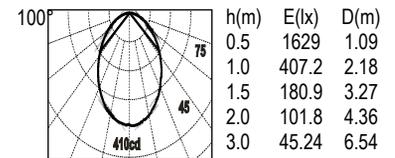


- Suspended round spot light ceiling mounted for accent lighting in residential and retail areas.
- Construction with extruded aluminium machined brass.
- High efficiency PMMA diffuser with 90% transmittance, U.V Stabilized


- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- White Reflector with 98% Reflectance
- Incremental suspension SS-304 wire adjustable upto 1 meter
- Extruded aluminium for better heat sink of LED.

- Strain relief cable clamp with terminal block.
- Powder coated for corrosion resistance.
- Wire from mains up to 2 core × 1.5mm<sup>2</sup>.
- Reiz Electronic LED driver constant current integrated, THD<15%, PF>0.95
- LED CRI : 85

## Boxy Mega



**0011620R396 001 300**  
 40W 3860lm 6500K  
 Optics : 100°  
**Led Color**  
 C 6000K  
 N 4000K  
 W 3000K  
**Finish**  
 W White  
 B Black  
 S Silver

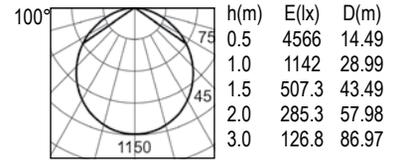


- Suspended luminaire to provide high output wide beam diffused light
- Construction in mitered extruded aluminium frame with Polycarbonate diffuser
- Powder coated corrosion resistance


- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp with terminal block

- Wire for mains supply cable 3c×1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85


## Rapier



**14809500121 1 2**  
 20W 20184lm 6000K  
 Cut off Angle : 60°  
**Led Color**  
 C 6000K  
 N 4000K  
 W 3000K  
**Finish**  
 W White  
 B Black  
 S Silver

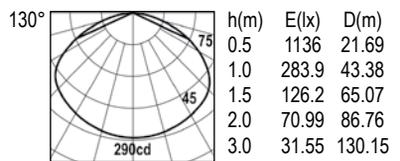

**1480950R572 1 2**  
 40W 3810lm 6000K  
 Cut Off Angle : 60° Optics : 131°  
**Led Color**  
 C 6000K  
 N 4000K  
 W 3000K  
**Finish**  
 W White  
 B Black  
 S Silver

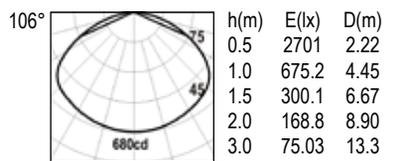


- LED luminaire for even diffused downward light
- Construction with extruded aluminium and machined brass
- Incremental suspension SS-304 wire adjustable upto 1mtr
- High efficiency PMMA diffuser with 90% transmittance, U.V Stabilized

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Powder coated for corrosion resistance
- Fixture holding system using stainless steel-304 fastening springs
- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp

- Wire for mains supply cable 3c×1.5mm<sup>2</sup>
- Line Joiner to be ordered separately
- Asymmetric option is only available in LED version
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Rapier Updown



**1480950R572** 1 2 130°  
 40W 3815lm up 2200lm down 6000K  
 Cut off Angle : 60°

<b>Led Color</b>	<b>Finish</b>
C 6000K	W White
N 4000K	B Black
W 3000K	S Silver

Photometric on Request  
 Up Light




- LED luminaire for even diffused up & down light, The up LEDs lights up the ceiling to give a pleasant working atmosphere in offices
- Construction with extruded aluminium and machined brass
- Incremental suspension SS-304 wire adjustable upto 1mtr

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- High efficiency PMMA diffuser with 90% transmittance, U.V Stabilized
- Powder coated corrosion resistance
- Fixture holding system using stainless steel-304 fastening springs

- Extruded aluminium for better heatsink of LED
- Strain relief cable clamp
- Wire for mains supply cable 3c×1.5mm<sup>2</sup>
- Line Joiner to be ordered separately
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## M.S. Joiner Line



**RMSJNRLN0125017AGL0**


Rapiers can be joined end to end create a continuous streak of Light using the line joiner.

# TASK LUMINAIRES


These lights are designed to highlight specific area minimising light spill. Designed for easy and lasting adjustability they can be personalised using LED colors, optics and finish.



## Scan Jet



**11201200801** 1 200  
 8W 628lm 6000K  
 Cut Off Angle : 22°  
 Led Color Optics Finish  
 C 6000K 12° W White  
 N 4000K 24° B Black  
 W 3000K 36° S Silver

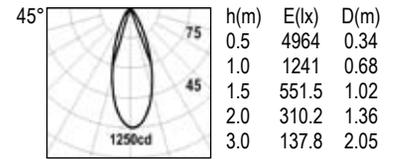


- Low Profile reading light with integrated switches for focused spot lighting for hotels, bedsides and study rooms
- Construction in aluminium die-cast and pressed metal sheet with flexible brass goose pipes
- High efficiency optics grade PMMA Lens


- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- Powder coated for corrosion resistance
- Lamp and fixture holding system using stainless steel-304 fastening springs
- Extruded aluminium for better heatsink of LED

- Strain relief cable clamp with terminal block
- Wire for mains supply cable 3C×1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Scan Cell



**16616200201** 1 200  
 3W 269lm 6000K  
 Cut Off Angle : 5°  
 Led Color Optics Finish  
 C 6000K 12° W White  
 N 4000K 24° B Black  
 W 3000K 36° S Silver

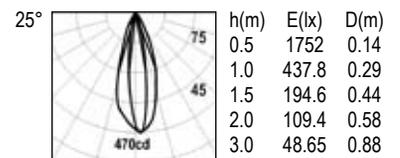


- Rectangular reading light with integrated switch for low glare focused spot lighting for hotels, bedsides and study rooms
- Construction in aluminium die-cast and pressed metal sheet with flexible brass goose pipes
- Chrome plated with P.U. lacquer

- Dimmable for brightness control via 0 to 10V, 1 to 10V, potentiometer, phase cut
- High efficiency optics grade PMMA Lens
- Powder coated corrosion resistance
- Extruded aluminium for better heatsink of LED


- Strain relief cable clamp with terminal block
- Wire for mains supply cable 3c×1.5mm<sup>2</sup>
- Reiz Electronic LED driver constant current integrated, THD<10%, PF>0.95
- LED CRI : 85

## Retrofit 50 MR-16




**MLLEDXM06** 5050T0  
6W 560lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

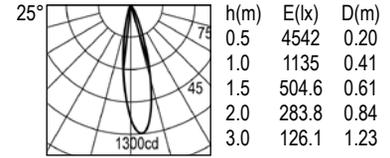

**MLLEDXM08** 5050T0  
8W 750lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

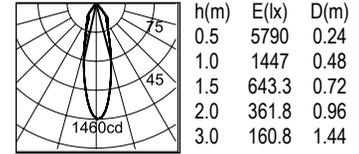


- For replacing halogen lamp QRCBC 51
- Construction in extruded aluminium for better heat sink of LED.

- Strain relieving cable clamp with quick connect harness for driver.
- Wire for mains supply cable 2cx1.5mm sq.


- LED consistent to 3 macadam ellipse.
- Reiz electronic LED driver integrated, THD<15%, PF> 0.95

## Retrofit AR-111



**MORFT0015** 150BLO  
15W 1350lm 6000K

Led Color	Optics	Finish
C 6000K	12°	W White
N 4000K	24°	B Black
W 3000K	36°	S Silver

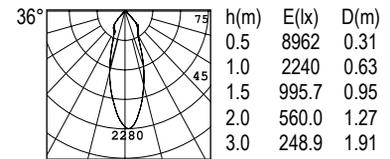

- For replacing halogen lamp QRCBC 51
- Construction in extruded aluminium for better heat sink of LED.

- Strain relieving cable clamp with quick connect harness for driver.
- Wire for mains supply cable 2cx1.5mm sq.

- LED consistent to 3 macadam ellipse.
- Reiz electronic LED driver integrated, THD<15%, PF> 0.95

